



Desiccant Drying

DRYPOINT® XC

efficient low dew point heatless desiccant drying

Truth in Compressed Air.



DRYPOINT® XC Heatless Desiccant Dryers

At a Glance

Regenerative desiccant dryers are frequently found in industrial applications around the world. These dryers use a desiccant material, which adsorbs the water vapor in the air stream. Heatless desiccant dryers utilize a small amount of dried air to regenerate the desiccant in one tower while the other tower dries the compressed air. XC Series heatless desiccant dryers provide very low dew points, are designed around reducing energy and process waste, and provide a very user friendly interface.

Features and Benefits

+ Innovative & Reliable Design

High quality components are used in construction and combined with high-level engineering

+ Compact Construction

Reduces traditional height by up to 30%

+ Advanced Controller

Each dryer includes a feature rich controller with energy saving modes


+ Ease of Maintenance

Open frame design where all features are front-mounted, simplifies maintenance and reduces costs

+ Wide Standard Range

Up to 2,800 scfm from 60 to 7,250 psig with fully customized engineered solutions available

How it Works

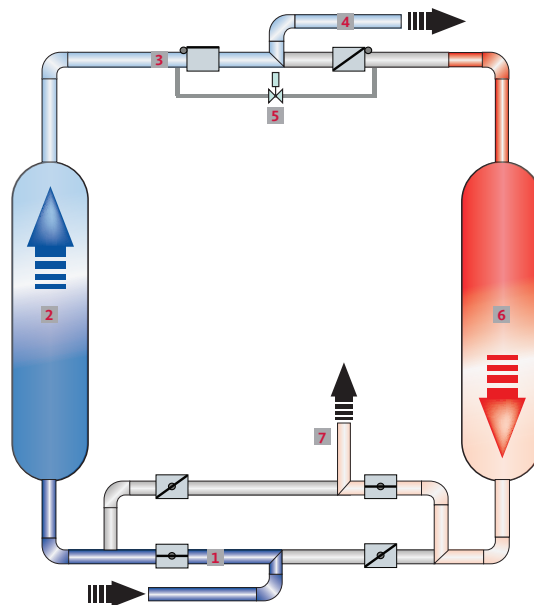


Warm, moisture saturated air enters the dryer through the open inlet valve, a required coalescing pre-filter (not pictured) is installed before entering the drying tower 1. Air flows upward through the tower 2 where the desiccant extracts and retains water vapor, thereby lowering the dew point, before exiting the top of the tower. The dry air passes through the outlet check valve 3 and passes through the particulate post-filter (not pictured) before exiting the dryer to the air distribution system 4. A small amount of dry air is diverted from the outlet flow of the drying tower to be used in regenerating the other


tower. This diverted air is controlled by the adjustable purge valve 5 and exits into the regenerating tower at near atmospheric pressure. This dry air flows downward through the tower 6, absorbing water from the moisture laden desiccant, before exiting near the bottom of the tower. This moist purge air passes through the purge exhaust valve and is vented to open atmosphere 7 through the muffler. After a set amount of time the air flow through the dryer will reverse, turning the drying tower into the regenerating tower.

DRYPOINT® XC Heatless Desiccant Dryers


Compare




ACC Series
Compact Heatless



XCe Series
Economy Heatless



XcP Series
Premium Heatless



AC HP Series
High Pressure Heatless

Flow Rates

4 - 105 scfm

80 - 800 scfm

80 - 2,800 scfm

35 - 480 scfm

Standard Outlet Pressure Dew Point | Optional

-40 °F | -100 °F

-40 °F | -100 °F

-40 °F | -100 °F

-40 °F | -100 °F

Maximum Operating Pressure

232 psig

150 psig

150 psig

7,250 psig

Average Purge Air

18%

15%

15%

3-7%

Available Options

PC connection software, Wall mounting bracket (ACC 4-35), Cover3More extended warranty

Mounted filters, 3-valve bypass, Cover3More extended warranty

Mounted filters, 3-valve bypass, Outdoor package, Pneumatic controls, Dew point monitor with display, Failure to switch alarm, Webpage with data log, Cover3More extended warranty

Dew point demand control, Shock and vibration damping, Cover3More extended warranty

Product Family




Heatless desiccant air dryers, compact, full size and high pressure models

Technical Details

DRYPOINT® XCe Economy Heatless Desiccant Dryers

with basic controller and slanted seat valves

- › Standard outlet pressure dew point: -40 °F
- › Optional outlet pressure dew point: -100 °F
- › Electrical power supply: 120 - 240 VAC | 50 - 60Hz
- › Required pre-filtration grade SX: .01 µm | Required post-filtration grade FX: 1 µm
- › UL / CSA certified
- › NEMA 4 indoor rated controls
- › ASME / CRN coded vessels
- › Min. / max. inlet air temperature: 40 °F / 120 °F
- › Min. / max. operating pressure: 60 / 150 psig

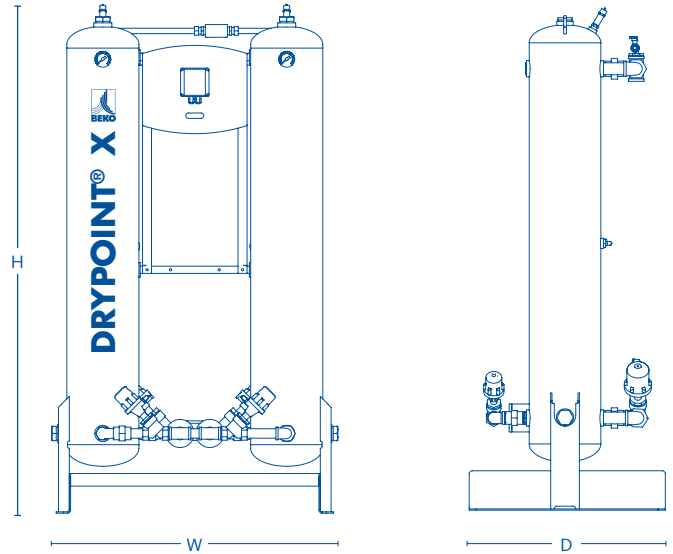

DRYPOINT® XCe	XCe 80	XCe100	XCe 120	XCe 160	XCe 200	XCe 250
Connection size (NPT)	¾"	1"	1"	1¼"	1½"	1½"
Flow Rate (scfm)	80	100	120	160	200	250
Dimensions and Weight						
H x W x D (inches)	70 x 31 x 22	70 x 34 x 24	70 x 34 x 24	72 x 39 x 27	72 x 39 x 27	75 x 45 x 32
Empty Weight (lbs)	128	203	203	311	311	460
Total Fill (lbs)	107	167	167	262	262	384

DRYPOINT® XCe	XCe 300	XCe 400	XCe 500	XCe 650	XCe 800
Connection size (NPT)	1½"	2"	2"	2½"	2½"
Flow Rate (scfm)	300	400	500	650	800
Dimensions and Weight					
H x W x D (inches)	75 x 45 x 32	77 x 51 x 36	79 x 54 x 38	82 x 62 x 41	81 x 63 x 44
Empty Weight (lbs)	460	649	845	1,074	1,270
Total Fill (lbs)	384	539	715	917	1,114

Correction Factor

Operating Pressure (psig)	60	70	80	90	100	110	120	130	140	150
Correction Factor	.65	.74	.83	.91	1.00	1.12	1.16	1.2	1.25	1.29

Inlet Air Temperature °F	90	95	100	105	110	115	120
Correction Factor	1.07	1.04	1.00	.86	.73	.64	.55

The correction factors on this page provide an estimation of the performance that can be achieved with the model sizes shown. For precise sizing for your application, please contact your BEKO Technologies sales representative.


Technical Details

DRYPOINT® XCp Premium Heatless Desiccant Dryers


with standard humidity control and BEKOTOUCH PLC

- › Standard outlet pressure dew point: -40 °F
- › Optional outlet pressure dew point: -100 °F
- › Electrical power supply: 120 - 240 VAC | 50 - 60Hz
- › Required pre-filtration grade SX: .01 µm | Required post-filtration grade FX: 1 µm
- › UL / CSA certified
- › NEMA 4 indoor rated controls
- › ASME / CRN coded vessels
- › Min. / max. inlet air temperature: 40 °F / 120 °F
- › Min. / max. operating pressure: 60 / 150 psig

DRYPOINT® XCp 80 - 800

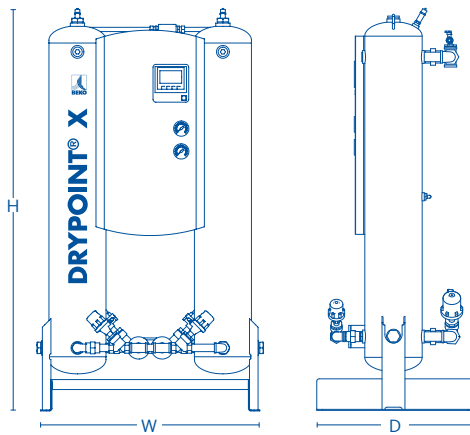

DRYPOINT® XCp 1000 - 2800

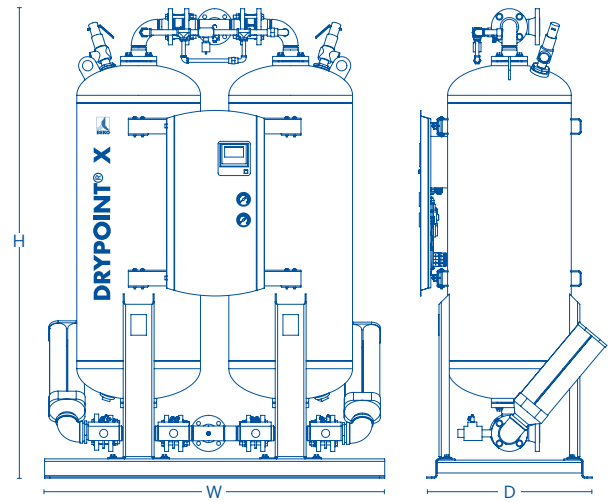

DRYPOINT®XCp	XCp 80	XCp 100	XCp 120	XCp 160	XCp 200	XCp 250	XCp 300	XCp 400	XCp 500
Connection Size (NPT)	¾"	1"	1"	1¼"	1¼"	1½"	1½"	2"	2"
Flow Rate (scfm)	80	100	120	160	200	250	300	400	500
Dimensions and Weight									
H x W x D (inches)	70 x 31 x 22	70 x 34 x 24	70 x 34 x 24	72 x 39 x 27	72 x 39 x 27	75 x 45 x 32	75 x 45 x 32	77 x 51 x 36	79 x 54 x 38
Empty Weight (lbs)	153	203	203	311	311	460	460	649	845
Total Fill (lbs)	107	167	167	262	262	384	384	539	715

DRYPOINT®XCp	XCp 650	XCp 800	XCp 1000	XCp 1200	XCp 1500	XCp 1900	XCp 2300	XCp 2800
Connection Size (NPT)	2½"	2½"	2½" Flange	2½" Flange	3" Flange	3" Flange	4" Flange	4" Flange
Flow Rate (scfm)	650	800	1000	1200	1500	1900	2300	2800
Dimensions and Weight								
H x W x D (inches)	82 x 62 x 41	81 x 63 x 44	90 x 66 x 32	91 x 66 x 37	91 x 72 x 44	96 x 72 x 44	103 x 78 x 48	103 x 78 x 48
Empty Weight (lbs)	1,074	1,270	1,490	1,792	2,814	2,814	4,168	4,168
Total Fill (lbs)	917	1,114	1,160	1,400	1,840	2,240	3,260	3,260

Correction Factor

Operating Pressure (psig)	60	70	80	90	100	110	120	130	140	150
Correction Factor	.65	.74	.83	.91	1.00	1.12	1.16	1.2	1.25	1.29

Inlet Air Temperature °F	90	95	100	105	110	115	120
Correction Factor	1.07	1.04	1.00	.86	.73	.64	.55


The correction factors on this page provide an estimation of the performance that can be achieved with the model sizes shown. For precise sizing for your application, please contact your BEKO Technologies sales representative.

■ Technical Details

DRYPOINT® ACC Compact Heatless Desiccant Dryers

CLEARPOINT® pre-filtration included as standard with post-filter integrated in dryer

- › Standard pressure dew point: -40 °F
- › Optional pressure dew point: -100 °F
- › Standard intelligent power supply: 12 - 24VDC/ 100 - 240 VAC; 50/60 Hz
- › Min. / max. air inlet temperature: 35 °F / 120 °F
- › Min. / max. ambient temperature: 41 °F / 120 °F
- › Min. / max. operating pressure: 58 / 232 psig

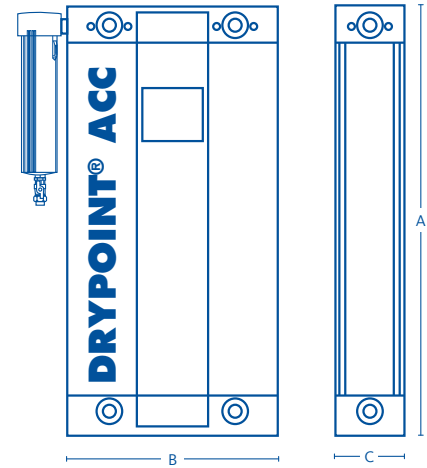

DRYPOINT® ACC	ACC 4	ACC 6	ACC 8	ACC 10	ACC 15	ACC 25
Capacity at -40° F (scfm)	4	6	8	10	15	25
Capacity at -100° F (scfm)	3	4	6	7	11	18
Connection Size	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"

Dimensions and Weight

H x W x D (inches)	18 x 11 x 4	20 x 11 x 4	22 x 11 x 4	25 x 11 x 4	32 x 11 x 4	42 x 11 x 4
Weight (lbs)	29	31	33	36	43	53

DRYPOINT® ACC	ACC 35	ACC 45	ACC 55	ACC 65	ACC 85	ACC 105
Capacity at -40° F (scfm)	35	45	55	65	85	105
Capacity at -100° F (scfm)	25	32	39	46	60	74
Connection Size	3/8"	3/4"	3/4"	3/4"	1"	1"

Dimensions and Weight

H x W x D (inches)	58 x 11 x 4	28 x 11 x 7	32 x 21 x 7	36 x 21 x 7	44 x 21 x 7	56 x 21 x 7
Weight (lbs)	68	117	130	141	165	200

Correction Factor

Operating Pressure (psig)	60	70	80	90	100	110	120	130	140	150
Correction Factor	.65	.73	.82	.91	1.00	1.09	1.17	1.26	1.35	1.44

Inlet Air Temperature °F	80	85	90	95	100	105	110	115	120
Correction Factor	1.07	1.06	1.05	1.03	1.00	.94	.88	.78	.67


The correction factors on this page provide an estimation of the performance that can be achieved with the model sizes shown. For precise sizing for your application, please contact your BEKO Technologies sales representative.

■ Technical Details

DRYPOINT® AC HP Heatless High Pressure Desiccant Dryers

full stainless steel components with PLC controller

- › Standard pressure dew point: -40 °F
- › Optional outlet pressure dew point: -100 °F
- › Vessels and all components are stainless steel
- › Optional pressure approvals: on request
- › Shock and vibration proof systems: on request
- › External low pressure purge attachment: on request
- › Standard electrical power supply: 85 - 265 VAC; 24 Vdc; 50-60 Hz
- › Included pre-filtration grade SX: .01 µm
- › Optional pre-filtration grade FX: 1 µm
- › Included post-filtration grade FX: 1 µm
- › Min. / max. air inlet temperature: 40 °F / 130 °F

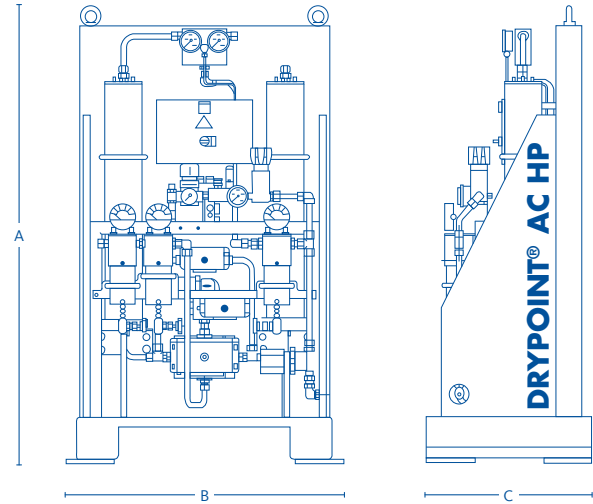

DRYPOINT® AC HP	AC 60 HP 100	AC 90 HP 100	AC 160 HP 100	AC 250 HP 100	AC 390 HP 100	AC 110 HP 250	AC 145 HP 250	AC 210 HP 250
Connection Size (NPT)	½"	½"	½"	½"	½"	½"	½"	½"
Flow Rate (scfm)	35	50	95	145	230	65	85	125
Max. pressure (psig)	1450	1450	1450	1450	1450	3600	3600	3600
Dimensions and Weight								
H x W x D (inches)	57 x 31 x 18	59 x 31 x 18	59 x 31 x 18	70 x 31 x 18	70 x 33 x 20	53 x 31 x 18	53 x 31 x 18	66 x 31 x 18
Weight (lbs)	350	350	400	550	570	460	485	540

DRYPOINT® AC HP	AC 440 HP 250	AC 655 HP 250	AC 145 HP 350	AC 190 HP 350	AC 265 HP 350	AC 540 HP 350	AC 820 HP 350
Connection size	½"	½"	½"	½"	½"	½"	½"
Flow rate (scfm)	260	385	85	110	155	315	480
Max. Pressure (psig)	3600	3600	5000	5000	5000	5000	5000
Dimensions and Weight							
H x W x D (inches)	66 x 31 x 18	70 x 33 x 20	53 x 31 x 18	53 x 31 x 18	66 x 31 x 18	66 x 31 x 18	70 x 33 x 20
Weight (lbs)	620	680	460	485	540	620	680

Correction Factor

Pressure (psig)	85°F	95°F	100°F	110°F	120°F	130°F
1,085 psig (AC HP 100)	.78	.76	.59	.46	.36	.29
1,450 psig (AC HP 100)	1.03	1.00	.78	.61	.48	.38

Pressure (psig)	85°F	95°F	100°F	110°F	120°F	130°F
2,900 psig (AC HP 250)	.86	.83	.65	.51	.40	.32
3,600 psig (AC HP 250)	1.03	1.00	.78	.61	.48	.38

Pressure (psig)	85°F	95°F	100°F	110°F	120°F	130°F
4,350 psig (AC HP 350)	.90	.990	.70	.54	.43	.34
5,000 psig (AC HP 350)	1.03	1.00	.78	.61	.48	.39

The correction factors on this page provide an estimation of the performance that can be achieved with the model sizes shown. Sizing must be done by a product specialist, please consult your BEKO Technologies representative.



ask your
sales representative
 for complete details
 and extend your full
 warranty today

Cover3More Extended Warranty Program

We give you more: In addition to a robust, standard 2-year warranty on BEKO Technologies products, we offer our customers the option of extending the standard warranty even further with the **Cover3More** program – a low cost, all-encompassing, and simple warranty extension program.

Secure your future with a minimal investment. The **Cover3More** extended warranty program from BEKO Technologies ensures that your investment is covered for a total of 5-years at a nominal cost.

- › Extends the standard factory warranty for an additional 3-years
- › May be purchased at any time up to 18-months post-sale
- › Can be applied to stocked or installed products
- › No hassle and easy to calculate without any hidden costs
- › Applicable to all product lines
- › 2-year standard warranty covers parts and labor
- › 3-year extended warranty covers parts only, no parts restrictions
- › Significantly reduces your risk of having unexpected costs

Cover3More on the Following Product Lines


DRYPOINT® RA	Refrigerant Air Dryers	BEKOMAT®	Zero Air Loss Drains
DRYPOINT® X / AC	Desiccant Air Dryers	QWIK-PURE®/ÖWAMAT®	Oil-water Separators
DRYPOINT® M	Membrane Air Dryers	METPOINT®	Instrumentation
CLEARPOINT®	Filters and Water Separators	BEKOKAT®	Hydrocarbon Removal Systems

Reliability you can count on: With the Cover3More extended warranty program, BEKO Technologies not only lengthens the standard warranty period by 3-years from the installation date, but also draws on the company's vast compressed air industry experience to quickly resolve any product problems you may experience in the least disruptive way possible, thereby keeping downtime to an absolute minimum. Should a repair be required, it will be handled by qualified, authorized personnel, and only original parts will be used.

All maintenance procedures, including filter element changes, must be carried out in accordance with the manual in order to maintain any warranty.

Cover3More Extended Warranty Program

Compare

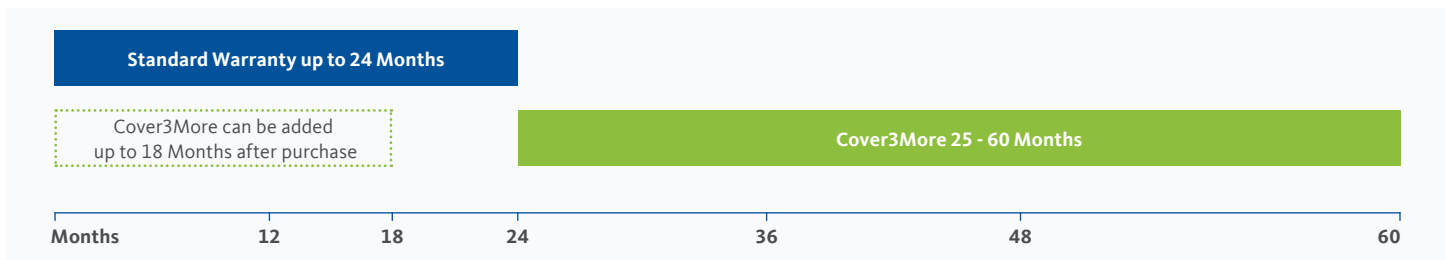

How it Works

- 1 Select the product or products that you wish to cover with the extended warranty.
- 2 Contact your BEKO Technologies sales representative to help calculate your final net price for extended coverage.
- 3 Include the information received along with your purchase order or purchase the warranty extension up to 18-months post-sale.

What we need from you: It's not much. In fact, if you are purchasing the Cover3More extended warranty with a new equipment purchase, all you have to do is include a line item on your order indicating which items you wish you cover, and we will take care of the rest. If you happen to be adding coverage to a product you've already taken delivery of, then all we need is the company name and contact information of the original purchaser, the product model number of the product to be covered, serial number, and original purchase order number or BEKO Technologies invoice number, and we will apply coverage appropriately. **Please feel free to contact us at +1 (800) 235-6797 to get started.**

What's in the fine print: The optional 36-month warranty extension (i.e. Cover3More) is a limited extended warranty that covers parts only from months 25-60.

However, all of the aforementioned installation, performance, and quality requirements must still be met in order to maintain extended warranty coverage. Failure to do so will render all warranties null and void.

The limited extended warranty coverage may be purchased and applied to any of the BEKO Technologies product lines included in the scope of the Cover3More extended warranty program from the original date of purchase from BEKO Technologies to 18-months thereafter.

Extended warranty coverage may not be purchased during the final 6-months of the standard warranty coverage, which are months 19-24 from the date of shipment or at BEKO Technologies' discretion, the date of installation.

The purchase price of the Cover3More limited extended warranty is not prorated and the current published purchase price is always applied.

Should the extended warranty coverage be purchased post-delivery or post-sale, then the serial number of all products to which the warranty shall be extended must be provided to BEKO Technologies at the time of purchase of the extended warranty.

Reliable | Efficient | Innovative

What can we do for you?



BEKO TECHNOLOGIES CORP.
900 Great Southwest Pkwy SW
Atlanta, GA 30336
USA
Phone +1 (404) 924-6900
Fax +1 (404) 629-6666
www.bekousa.com

